MCGRAW-EDISON®

TRR
TRADITIONAIRE™

70-250W
Metal Halide
High Pressure Sodium

POST-TOP
AREA LUMINAIRE

- Decorative cupola conceals optional photocontrol
- Hinged, die-cast aluminum cover has steel hinge pins and captive cover-retaining screws
- Injection-molded, prismatic acrylic refractor panels provide Type II asymmetric or Type V symmetric light pattern
- Porcelain enclosed, socket is positioned to provide proper location of the lamp for maximum optical efficiency
- Single-piece, die-cast aluminum housing has integral base and lens supports
- Integral self-aligning pole top fitter fits 3" O.D. poles or vertical tenons
- Approximate net weight: 22 lbs. (10 kgs.)

DESCRIPTION

The Traditionaire™ outdoor luminaire displays the old-fashioned charm of traditional area lighting, enhancing any setting with a distinctive styling. U.L. listed and CSA certified for wet locations.

As a decorative luminaire, the Traditionaire™ tastefully complements the architectural and environmental design of estates, parks, motels, restaurants, apartments, churches, institutions and roadways.

DIMENSIONS

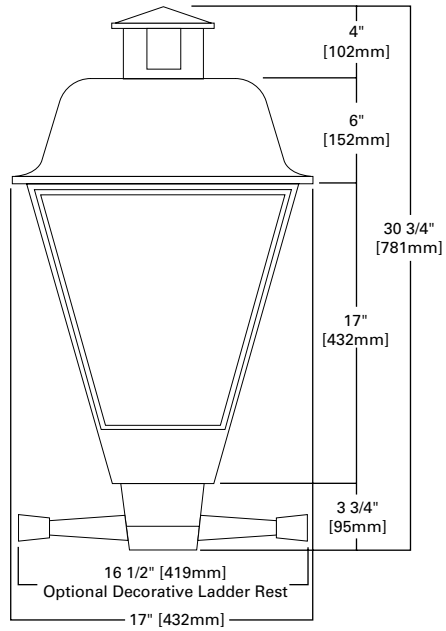

ORDERING INFORMATION

SAMPLE NUMBER: TRR-150-MH-120-2-BK

Product Family	Lamp Wattage[1]	Lamp Type	Voltage[2]	Distribution	Color	Options & Accessories
TRR=Refractive Traditionaire	**50**=50W **70**=70W **100**=100W **150**=150W **175**=175W **250**=250W	**MH**=Metal Halide **HPS**=High Pressure Sodium	**120**=120V **208**=208V **240**=240V **277**=277V **347**=347V **480**=480V **MT**=Multi-Tap[3] **TT**=Triple-Tap[4]	**2**=Type II Refractive **5**=Type V Refractive	**AP**=Grey **BZ**=Bronze **BK**=Black **WH**=White **GN**=Hartford Green **DP**=Dark Platinum **GM**=Graphite Metallic	(See Below)

E.P.A. 2.3

Options[5]
P=Polycarbonate Refractor
R=NEMA Twistlock Photocontrol Receptacle
L=Lamp Included
S=Toolless Entry

Accessories[6]
OA/RA1016=NEMA Twistlock Photocontrol—Multi-Tap
OA/RA1027=NEMA Twistlock Photocontrol—480V
OA1201=NEMA Twistlock Photocontrol—347V
TA1BK=Ladder Rest

NOTES: **1** All Metal Halide lamps 150W and below are medium-base. 175W and above are mogul-base. **2** Product also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering information. **3** Multi-Tap ballast is 120/208/240/277V wired 277V. **4** Triple-Tap ballast is 120/277/347V wired 347V. **5** Add as suffix in the order shown. **6** Order separately, replace XX with color suffix. **7** Specifications and dimensions subject to change without notice.